



E254 Double rod cylinders



They are double-acting cylinders and are born for the control of the mainsheet travellers but they are also used for the movement of the genoa cars or other custom functions.

Normally they are used with a 2:1 or 3:1 inverse tackle, which is why a range of accessories is available for coupling with many of the blocks on the market.

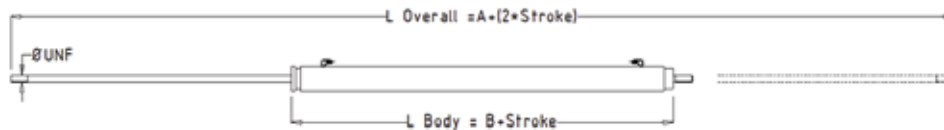

Technical Data

Ref.	Description	Max pull force @ 5000PSI	Body Ø (mm)	Thread (UNF)	A (mm)	B (mm)	Stroke (mm)
E254-XX-010	-10 double rod cylinder	2630	42	1/2-20	312	243	Custom
E254-XX-012	-12 double rod cylinder	3450	52	5/8-18	340	250	Custom
E254-XX-017	-17 double rod cylinder	4940	57	5/8-18	352	265	Custom
E254-XX-022	-22 double rod cylinder	6300	63	3/4-16	396	278	Custom
E254-XX-030	-30 double rod cylinder	10020	82	7/8-14	405	348	Custom
E254-XX-040	-40 double rod cylinder	14610	101	1-12	502	363	Custom